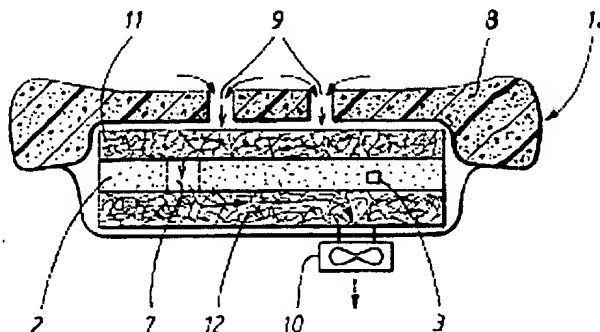


SEAT CONSTRUCTION**Patent number:** WO2005035305**Publication date:** 2005-04-21**Inventor:** WESTH GUSTAV (SE); SAREN JARI (SE); GASIC NINO (SE); OEBERG PETER (SE)**Applicant:** KONGSBERG AUTOMOTIVE AB (SE); WESTH GUSTAV (SE); SAREN JARI (SE); GASIC NINO (SE); OEBERG PETER (SE)**Classification:****- international:** **A47C7/74; B60N2/26; B60N2/28; B60N2/56; B60R21/01; A47C7/72; B60N2/26; B60N2/56; B60R21/01;** (IPC1-7): B60N2/56; A47C7/74; B60R21/16**- european:** A47C7/74; B60N2/26; B60N2/28; B60N2/56C4C; B60R21/01H**Application number:** WO2004SE01389 20040929**Priority number(s):** SE20030002699 20031010**Also published as:**SE525958 (C2)
SE0302699 (L)**Cited documents:**US6291803
DE10019370
US6541737

Report a data error here

Abstract of WO2005035305

The invention relates to a seat construction (1) comprising a seat cushion part (1 a) and a backrest part (1 b), and: a presence sensor (2) for detecting at least the presence of a person or an object placed in the said seat construction (1), means for ventilating the seat construction (1) comprising at least one duct (7) through the said presence sensor (2) and at least one air passage (9) through the rest of the seat construction (1), and a device (10) for feeding an air current through the said air passage (9) and through the said duct (7) for ventilation of a predetermined region (1c) adjacent to the seat construction (1). According to the invention, the seat construction (1) comprises a layer (12) of an air-distributing material disposed between the said presence sensor (2) and the said air-current-feeding device (10), whereby a flow path is provided for the said air current through the air passage (9), the duct (7), the said layer (12) of air-distributing material and the said air-current-feeding device (10). As a result of the invention, an improved seat construction is provided, having a presence sensor which also allows ventilation of the vehicle seat in an advantageous manner.

Data supplied from the **esp@cenet** database - Worldwide

BEST AVAILABLE COPY

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 April 2005 (21.04.2005)


PCT

(10) International Publication Number
WO 2005/035305 A1

- (51) International Patent Classification⁷: **B60N 2/56**, Huskvarna (SE). **ÖBERG, Peter** [SE/SE]; Skolvägen 21, S-560 42 Sandhem (SE).
- (21) International Application Number: PCT/SE2004/001389 (74) Agent: **ALBIHNS GÖTEBORG AB**; Box 142, S-401 22 Göteborg (SE).
- (22) International Filing Date: 29 September 2004 (29.09.2004) (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data: SE 0302699-4 10 October 2003 (10.10.2003) SE (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (for all designated States except US): **KONGBERG AUTOMOTIVE AB** [SE/SE]; Box 504, S-565 28 Mullsjö (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **WESTH, Gustav** [SE/SE]; Österåsvägen 5, S-565 32 Mullsjö (SE). **SARÉN, Jari** [SE/SE]; Spånhultsvägen 24, S-562 31 Norrahammar (SE). **GASIC, Nino** [SE/SE]; Ebbesvägen 3, S-561 39

[Continued on next page]

(54) Title: SEAT CONSTRUCTION

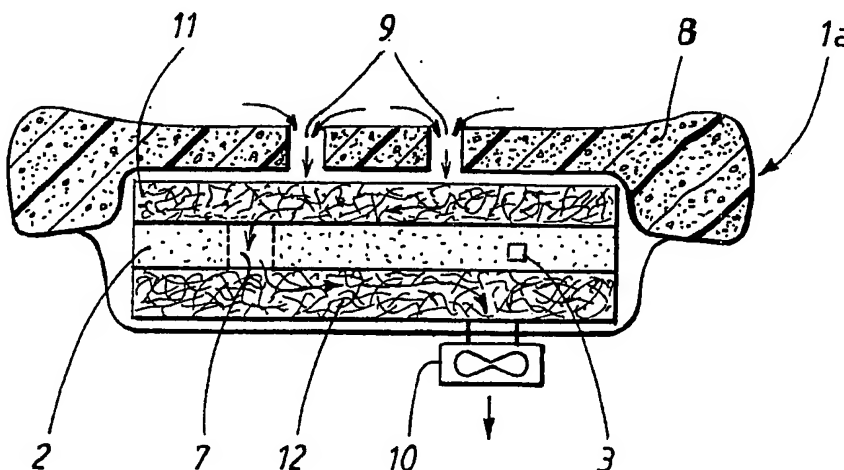

(57) Abstract: The invention relates to a seat construction (1) comprising a seat cushion part (1 a) and a backrest part (1 b), and a presence sensor (2) for detecting at least the presence of a person or an object placed in the said seat construction (1), means for ventilating the seat construction (1) comprising at least one duct (7) through the said presence sensor (2) and at least one air passage (9) through the rest of the seat construction (1), and a device (10) for feeding an air current through the said air passage (9) and through the said duct (7) for ventilation of a predetermined region (1c) adjacent to the seat construction (1). According to the invention, the seat construction (1) comprises a layer (12) of an air-distributing material disposed between the said presence sensor (2) and the said air-current-feeding device (10), whereby a flow path is provided for the said air current through the air passage (9), the duct (7), the said layer (12) of air-distributing material and the said air-current-feeding device (10). As a result of the invention, an improved seat construction is provided, having a presence sensor which also allows ventilation of the vehicle seat in an advantageous manner.

WO 2005/035305 A1

BEST AVAILABLE COPY



Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TITLE:

Seat construction.

TECHNICAL FIELD:

- 5 The invention relates to a seat construction comprising a seat cushion part and a backrest part, and a presence sensor for detecting at least the presence of a person or an object placed in the said seat construction, means for ventilating the seat construction comprising at least one duct through the said presence sensor and at least one air passage through the
- 10 rest of the seat construction, and a device for feeding an air current through the said air passage and through the said duct for ventilation of a predetermined region adjacent to the seat construction.

PRIOR ART:

- 15 In modern-day motor vehicles, for example private cars, various types of safety devices are used for the passengers in the motor vehicle. For example, seat belts and airbags are used to increase safety for the passengers.
- 20 An airbag can be placed, for example, in the steering wheel hub of a vehicle, in order to protect the driver of the vehicle, and in the dashboard, in order to protect a passenger in the front passenger seat of the vehicle. Although, for example, an airbag which is placed in the dashboard in front of the front passenger seat can offer good protection for a passenger in this seat, a
- 25 problem arises from the fact that the airbag can also cause injury if the passenger is sitting, for example, in a heavily forward-leaning position or if there is a rear-facing child seat placed in the passenger seat.

- A traditional airbag is optimized in terms of its protective effect for a person of
- 30 normal build and weight and, not least, a normal sitting position of a passenger in the particular seat. In the event of deviations from these normal conditions, an activated airbag can therefore cause injury to the passenger.

- As a result of the above problems, special presence sensors have been
- 35 produced, intended, for example, for the passenger seat in the front of a vehicle. The purpose of such a presence sensor is to detect whether a

person is sitting in the particular seat and – if so – expediently also to detect and record additional parameters such as, for example, the weight, weight distribution and posture of the person. The presence sensor is further connected to an electronic control unit for the recording of detected
5 parameters. In this way, detected information from the presence sensor can be used to regulate the process for activating an airbag. For example, the airbag can be activated with reduced power, i.e. with a reduced quantity of gas which is generated as it is inflated, if a person is sitting leaning forward in the seat. Likewise, the airbag can be fully prevented from being released if
10 there is a rear-facing child seat placed in the seat. In addition, the time period for the inflation of the airbag can be controlled in dependence on, for example, the weight and posture of the passenger.

According to the prior art, a presence sensor of the aforementioned type can
15 be made up of a bladder which is filled with silicone and which is positioned inside the seat cushion part of the particular seat. The bladder then has an extent which substantially corresponds to the region in which the passenger is expected to sit in the seat. The weight and the weight distribution resulting from a passenger sitting in the seat can then be detected with the aid of a
20 pressure transducer in the bladder and can further be recorded in an electronic control unit. As stated above, the recorded information can afterwards be used for optimal control of an airbag should it be activated in a collision.

25 A presence sensor of the aforementioned type is previously known through patent document US 6286861.

In order to make optimal use of a presence sensor of the known type, an analysis is normally made of the seat type in which it is intended to be used,
30 especially as regards the pressure changes which occur in the presence sensor in a variety of occurring situations with regard to weight, weight distribution, posture, etc. of a passenger in this seat type. Recorded values from this analysis with respect to pressure changes occurring in the presence sensor as a result of various operating scenarios can then be stored and can
35 constitute a norm for the particular seat type and then, during running, be

used for comparisons with actual measured values. In this way, the process for activating an airbag can be optimally regulated.

5 In such an analysis, or charting, of the working of a presence sensor in a certain seat type, there are normally certain regions in a fitted presence sensor which do not produce any altered measured signal from the pressure transducer, even if the weight, weight distribution, etc. of the passenger were to change. Such regions, which do not actually contribute to the information for the detection carried out with the aid of the presence sensor, are usually
10 referred to as "dead zones".

Since the dead zones do not contribute to the result from the measurement with the presence sensor, they can be physically removed from the rest of the presence sensor. In this way, a presence sensor can comprise, for
15 example, one or more ducts, the placement of which corresponds to the positions of the respective dead zone. These ducts thus constitute openings straight through the presence sensor and can be used, for example, for drawing cabling through the presence sensor, which is an advantage from the stuffing viewpoint.

20

Similarly, other components can also be positioned in the seat such that benefit can be gained from the created openings in the dead zones.

25 A problem with a construction of the aforementioned type, having ducts in the presence sensor in positions corresponding to the aforementioned dead zones, arises from the fact that these positions are only able to be determined once the complete seat construction is finished and has been analysed in the aforementioned manner, i.e. only once it has been established how a certain presence sensor operates in a certain seat
30 construction. This means that the correct positions in which possible cabling or additional components are to be fitted cannot be known in advance. This makes the design, shaping and stuffing of the complete seat and its various integral components more difficult.

DISCLOSURE OF THE INVENTION:

An object of the invention is to provide an improved seat construction comprising a presence sensor of the type which includes dead zones of the
5 aspect, correct installation of an additional component adjacent to the presence sensor.

The invention is particularly suitable for use in those seat constructions which are ventilated, i.e. in which the additional component is constituted by a fan
10 or a corresponding device for generating an air flow through the seat construction.

The aforementioned object is achieved by means of a device of the type stated in the introduction, which is characterized in that the seat construction
15 comprises a layer of an air-distributing material disposed between the said presence sensor and the said air-current-feeding device, whereby a flow path is provided for the said air current through the air passage, the duct, the said layer of air-distributing material and the said air-current-feeding device.

20 DESCRIPTION OF THE FIGURES:

The invention will now be described with reference to a preferred embodiment and the appended figures, in which:

Figure 1 shows in simplified form a vehicle seat having a presence
25 sensor which can be used in the control of an airbag,

Figure 2 shows a top view of a presence sensor, and

Figure 3 shows a cross-sectional view along the section A-A in Figure 2,
30 illustrating the basic principles behind the present invention.

PREFERRED EMBODIMENT:

The invention will now be described firstly with reference to Figure 1, which is a simplified perspective view of a seat in the form of a vehicle seat 1 for, for
35 example, private cars, lorries, buses and other vehicles. In a manner which is substantially previously known, the vehicle seat 1 is made up of a seat

cushion part 1a and a backrest part 1b, the seat cushion part 1a being provided with a presence sensor 2 for detecting at least whether there is a person or an object present in the vehicle seat 1. Expediently, the presence sensor 2 is also used to generate signals which indicate not only the possible presence, but also the weight and weight distribution of a passenger or an object in the seat 1.

The presence sensor 2 is per se of a previously known type and is formed by a bladder filled with suitable medium, preferably silicone. The presence sensor 2 is fitted inside the structure of the vehicle seat 1 in a manner which is not shown in detail, but which expediently makes use of a sheet-metal pan or spring mat forming a frame for the vehicle seat 1. The presence sensor 2 can further be provided with a disc (not shown) made of hard plastics material, which acts as a pressure-equalizing component fitted beneath the presence sensor 2. Beneath this plastics disc, a layer (not shown) of a suitable felt material may additionally be disposed, which in this case aims to protect the structure from wear.

Disposed adjacent to the presence sensor 2 there is a pressure transducer 3. This pressure transducer 3 is, in turn, connected to an electronic control unit 4. The control unit 4 can be constituted by a separate unit or can functionally be integrated in a control unit present in the vehicle. On the basis of recorded values relating to the pressure p in the presence sensor 2, which are measured with the aid of the pressure transducer 3, the control unit 4 can be set up suitably to control the activation of an airbag 5 disposed in the vehicle. For example, a gas generator 6 belonging to the airbag 5 can be controlled with suitably chosen power, alternatively with a suitably chosen time period for blowing in the gas from the gas generator 6, in dependence on measured pressure signals which, per se, constitute indications of weight, posture, etc. of a passenger in the vehicle seat 1.

In connection with the design and production of the vehicle seat 1, an extensive testing and analysis is normally made of the results of the signals generated by the presence sensor 2, i.e. of how different imaginary situations in which passengers and objects of different weight, weight distribution, etc. are placed in the vehicle seat 1 lead to different corresponding detected

- pressure values where detection is effected with the aid of the pressure transducer 3. This testing is used to create a set of charted values, which are used in controlling the airbag 5. According to what was described in the introduction, such a testing can also be expected to result in certain regions of the presence sensor 2 not being able to make any contribution to the measurements with the pressure transducer 3, i.e. the signals from the pressure transducer 3 do not change, even if the load and the weight distribution acting against the presence sensor 2 are changed. Such regions are referred to as "dead zones" and thus make no relevant contribution to the information from the pressure transducer 3. That part of the presence sensor 2 which corresponds to a dead zone can in this case be removed. Such a dead zone 7 is shown diagrammatically in Figure 1 and is constituted by a duct through the presence sensor 2.
- 15 The invention is not limited to any specific configuration, number or specific dimensions of such dead zones, but can be applied in connection with different types of presence sensors which allow a certain part to be removed, for example in the manner shown in Figure 1.
- 20 The dead zone 7 illustrated in Figure 1 is also shown in Figure 2, which is a top view of the presence sensor 2. The duct corresponding to the dead zone 7 can be used, for example, to feed through an electric cabling. The present invention is specifically intended, however, for those situations in which the vehicle seat 1 is of the type which will be set up to ventilate the top surface of the seat, which is done for comfort and safety reasons in a vehicle. Both the driver's seat and other vehicle seats can in this case be set up to ventilate the surface of the seat through the blowing-in or extraction of air. In such seats there is a need to use a fan or corresponding device to feed an air current through the seat, more precisely past the surface of the seat so that it can be ventilated. More precisely, there is then a desire to ventilate a certain predetermined region 1c adjacent to the surface of the seat cushion part 1a, i.e. where a passenger normally sits.
- 30

Figure 3 is a cross-sectional view from the front of the seat cushion part 1a of the vehicle seat 1, along the sectional line A-A indicated in Figure 2. As can be seen from Figure 3, the seat cushion part 1a is made out of a foam

35

material 8. Modern-day seats are normally produced by so-called cold-foaming, which is a known production method for producing soft, elastic foam plastic. The foam material 8 for the precast parts which are used as the seat cushion part 1a and backrest part 1b respectively is also referred to as
5 comfort foam and, as can be seen from Figure 3, is configured with a number of – expediently two or more – through-channels 9, which aim to allow the passage of an air current through the vehicle seat 1.

10 The invention aims, in particular, to allow an effective passage of an air current from the surface of the seat cushion part 1a, and onward out to the surroundings, with the aid of a fan 10 disposed on the bottom side of the seat cushion part 1a. According to the embodiment shown in Figure 3, the fan 10 is therefore of the suction-fan type. In order to allow passage of an air current, a first layer 11 of an air-distributing material is further disposed on
15 top of the presence sensor 2. The air current which is conducted down through the openings 9 will reach the said first layer 11 of air-distributing material and is then spread in different directions so that the air current is distributed over substantially the whole of the surface in which the said air-distributing material is found. More particularly, it can be stated that the first
20 layer 11 of air-distributing material allows passage of air in substantially the same direction as the plane along which the top side of the seat cushion part 1a is orientated, i.e. substantially in the transverse direction relative to the direction of the openings 9.

25 According to what has been explained above, there is additionally a dead zone 7 present in the presence sensor 2. In this dead zone 7 a corresponding opening is made, i.e. a duct which allows passage of air in either direction through the presence sensor 2. With reference to Figure 3, it can be noted that a basic principle behind the present invention is that a
30 second layer 12 of air-distributing material is disposed beneath the presence sensor 2. More precisely, the said second layer 12 is arranged with dimensions which at least overlap the positions of the dead zone 7, on the one hand, and the position of the fan 10, on the other hand. This arrangement allows an air current to be fed from the surface of the seat
35 cushion part 1a and through the whole of the seat cushion part 1a and then further out from the bottom side of the seat cushion part 1a (as indicated by

arrows in Figure 3). The air is thus conducted with the aid of the fan 10 from the top side of the seat cushion part 1a, through the channels 9 in the foam material 8 and onward to the topmost layer 11 of air-distributing material. Moreover, the fact that the second layer 12 of air-distributing material is
5 disposed beneath the presence sensor 2 allows an air passage from the top side of the seat cushion part 1a, through the first layer 11 of air-distributing material, through the dead zone 7 and onward through the second layer 12 of air-distributing material, after which the air current reaches the fan 10 and can be fed out to the surroundings. The flow path of the air is indicated
10 diagrammatically in Figure 3 with the aid of arrows.

The invention offers a substantial advantage in that the fan 10 can be placed in any chosen position in connection with the design of the vehicle seat 1. In other words, the particular seat 1 can be designed in such a way that the
15 position of the fan 10 can be determined in advance, in principle fully irrespective of where the dead zones in the seat 1 end up being situated. A, from the functional aspect, correct installation of the fan 10 in relation to the presence sensor 2 is thus allowed, despite the fact that these components are not, per se, positioned directly adjacent to each other, but instead a flow
20 path for the air current is allowed through the second layer 12 of air-distributing material.

The two layers 11, 12 of air-distributing material are expediently of similar type, having a porous fibrous structure made of relatively thin fibres which
25 are relatively sparsely placed in an asymmetrical, three-dimensional network structure so that air supplied to the fibre network is duly distributed. This air-distributing material is not significantly compressed when someone sits down in the seat, so that its working is not then significantly affected in this situation. The air-distributing material further allows air flow both along and
30 transversely to the principal extent of the seat cushion part, and also air flow in intermediate directions.

As the air-distributing material, so-called "spacer material", alternatively "3D-weave", is used. Other suitable materials are rubberized hair, reticulated
35 foam, so-called cross-fibres or other suitable fibres. The invention is not

limited to any specific material, but can be realized with the materials which are suitable for providing the described air-distributing function.

5 The invention is not limited to the above-stated embodiment, but can be varied within the scope of the following claims. For example, the invention is not limited to use with a suction fan, but can alternatively be implemented with a blowing fan.

10 Furthermore, the invention is not limited to a seat cushion part of a vehicle seat, but can also, in principle, be implemented in a backrest part.

15 The principle behind the invention can also, in principle, be implemented in a simplified form without utilizing the topmost layer 11 of air-distributing material. In such an embodiment, the channels through the comfort foam are expediently positioned in such a way that air passage through a dead zone in the presence sensor is allowed in a correct manner.

20 The aforementioned plastics layer (not shown) which can be fitted beneath the presence sensor can either be placed directly beneath the presence sensor 2, i.e. between the presence sensor 2 and the underlying layer 12 of air-distributing material, or beneath the said layer 12 of air-distributing material. In the former case, there is expediently an opening in the plastics layer corresponding to the position of the dead zone 7, and, in the latter case, there is expediently an opening in the plastics layer corresponding to the position of the fan 10.

25 In general terms, it can also be stated that the invention is not limited to seat constructions only for vehicles, but can also be applied to other types of ventilated seats.

CLAIMS:

1. Seat construction (1) comprising a seat cushion part (1a) and a
backrest part (1b), and: a presence sensor (2) for detecting at least the
5 presence of a person or an object placed in the said seat construction (1),
means for ventilating the seat construction (1) comprising at least one duct
(7) through the said presence sensor (2) and at least one air passage (9)
through the rest of the seat construction (1), and a device (10) for feeding an
air current through the said air passage (9) and through the said duct (7) for
10 ventilation of a predetermined region (1c) adjacent to the seat construction
(1), c h a r a c t e r i z e d i n that the seat construction (1)
comprises a layer (12) of an air-distributing material disposed between the
said presence sensor (2) and the said air-current-feeding device (10),
whereby a flow path is provided for the said air current through the air
15 passage (9), the duct (7), the said layer (12) of air-distributing material and
the said air-current-feeding device (10).
2. Seat construction (1) according to claim 1,
c h a r a c t e r i z e d i n that the said presence sensor (2) is
20 additionally set up to detect the weight and the weight distribution of the said
person or object.
3. Seat construction (1) according to claim 1 or 2,
c h a r a c t e r i z e d i n that the said presence sensor (2)
25 comprises a pressure transducer (3).
4. Seat construction (1) according to claim 3,
c h a r a c t e r i z e d i n that the said pressure transducer (3)
comprises a connection to a control unit (4) for controlling the working of an
30 airbag (5) in dependence on detected signals from the said presence sensor
(2).
5. Seat construction (1) according to any one of the preceding claims,
c h a r a c t e r i z e d i n that the said air-current-feeding
35 device (10) is constituted by a suction fan (10).



6. Seat construction (1) according to any one of claims 1-4,
c h a r a c t e r i z e d i n that the said air-current-feeding
device is constituted by a blowing fan.

5 7. Seat construction (1) according to any one of the preceding claims,
c h a r a c t e r i z e d i n that the said layer (12) of air-
distributing material has its extent along the bottom side of the said presence
sensor (2) and in that the said air-current-feeding device (10) is connected to
the said layer (12) of air-distributing material.

10

8. Seat construction (1) according to any one of the preceding claims,
c h a r a c t e r i z e d i n that an additional layer (11) of air-
distributing material is arranged with its extent on top of the said presence
sensor (2).

1/2

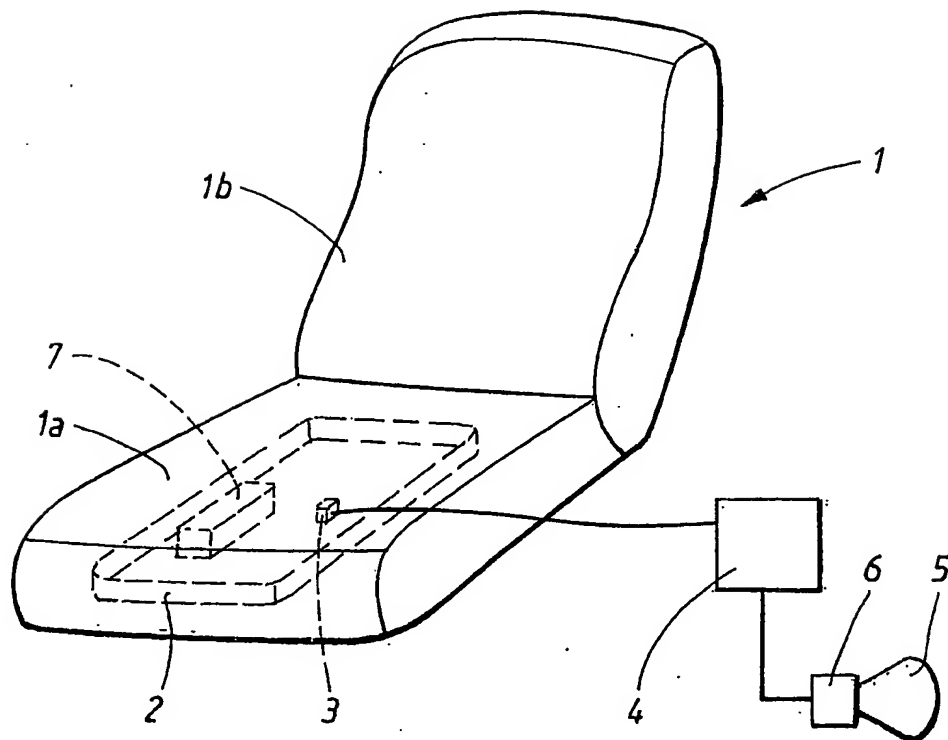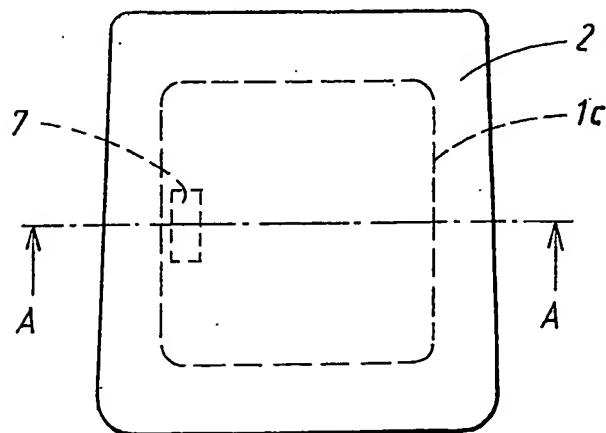FIG. 1FIG. 2

2/2

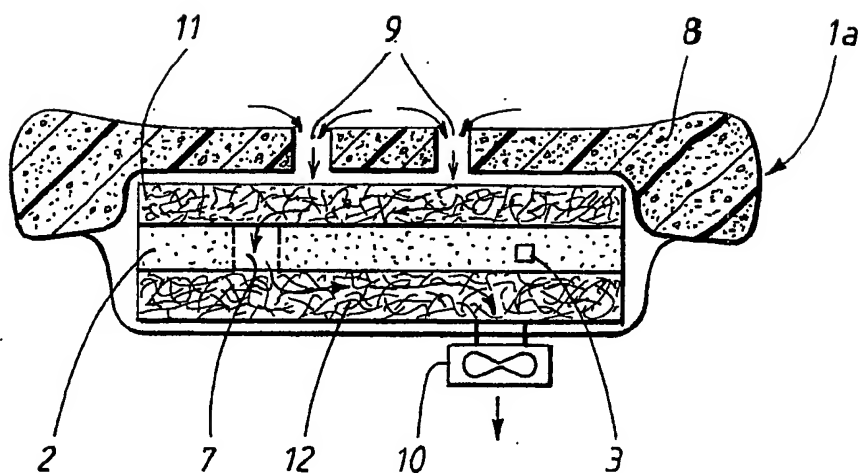


FIG.3

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001389

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B60N 2/56, B60R 21/16, A47C 7/74

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B60N, B60R, A47C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTENRAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6291803 B1 (FOURREY), 18 Sept 2001 (18.09.2001), column 4, line 40 - column 6, line 28 --	1,5-8
A	DE 10019370 A1 (HELSA-WERKE HELMUT SANDLER GMBH & CO. KG), 31 October 2001 (31.10.2001) --	1,5-8
A	US 6541737 B1 (EKSIN ET AL), 1 April 2003 (01.04.2003) -- -----	5-7

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 January 2005

Date of mailing of the international search report

12-01-2005

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Erik Wiss/EK

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/11/2004

International application No.

PCT/SE 2004/001389

US	6291803	B1	18/09/2001	AT	256501	T	15/01/2004
				DE	69913721	D,T	28/10/2004
				EP	1121199	A,B	08/08/2001
				FR	2790430	A,B	08/09/2000
				JP	2002527760	T	27/08/2002
				US	6680193	B	20/01/2004

DE	10019370	A1	31/10/2001	NONE
----	----------	----	------------	------

US	6541737	B1	01/04/2003	DE	19851979	A,C	25/05/2000
				FR	2785581	A,B	12/05/2000
				GB	2343747	A,B	17/05/2000
				GB	9926547	D	00/00/0000
				IT	1307595	B	14/11/2001
				IT	RM990693	A	10/05/2001
				JP	3303236	B	15/07/2002
				JP	2000142069	A	23/05/2000
